



i3HUDDLE 2.0

W7510 4K

A PLUG & PLAY TOTAL MEETING ROOM SOLUTION THAT ALLOWS YOU TO FOCUS ON DOING YOUR JOB

Walk up to the display, draw, annotate, share and convert. No training required; it is straightforward and intuitive. i3HUDDLE is a simple, hassle-free meeting solution that connects people in a secure environment. Whether doing an online sales demo, setting up a meeting with colleagues in another location or hosting a web conference, interactive meeting has never been easier than with the i3HUDDLE total meeting solution. i3HUDDLE – your efficient and secure meeting solution around your conference table or halfway across the world.

INTERACTIVE

- Connects professionals in a secure environment
- C-Sense touch technology: Finger or stylus recognition
- Multi-user interaction with up to 40 touch points
- Very accurate: even the slightest touch is registered as input

INSPIRING

- Dynamic backgrounds
- Facilitates online presentations, trainings or demos
- Intuitive, no training required
- Reduces travel time, increases efficiency, saves time
- High durability
- Extremely precise and responsive
- Increased product life span

INTEGRATED

- Wireless presenting tool with i3SYNC Touch
- Quick whiteboarding with i3NOTES
- i3MEETINGHUB the next generation collaboration suite
- Browse immediately on the web
- Save on travel expenses by organizing online meetings
- Explore and manage your files in an obvious way
- Meeting room planner for a clear overview of meetings
- Enhance efficiency with several productivity apps
- 4 mm Anti-Reflexion safety glass
- Professional panel for 24/7 use
- Equipped with sound bar for premium quality audio
- Warranty: 3 years*

**optional warranty extension available*



CAPACITIVE TOUCH TECHNOLOGY

A capacitive touchscreen, as smartphones and tablets, uses the electrical properties of the human body. The human body is conductive, meaning electricity can pass through it. So when you touch a capacitive screen with the tip of your finger (think of it as another electrical conductor), you cause a change in the screen's electrical field. Even the slightest touch of your finger will be measured. C-SENSE is by far the most accurate and precise touch technology, with unequalled user experiences as a result.




i3-TECHNOLOGIES

| 1-1. Panel | |
|-----------------------------------|-------------------------------------------------------|
| Diagonal size | 75 inch (1892.73cm) |
| Panel Resolution | 3840 x 2160 @60Hz |
| Player Resolution | 1920 x 1080 |
| Brightness(nits) | 410 cd/m² (Typical) |
| Contrast ratio | 1200 : 1 (Typical) |
| Response time | 8 ms (Typical) |
| Aspect ratio | 16 : 9 |
| Display colors | 10 bit, 1.07 Billion colors |
| Viewing angle horizontal/vertical | 178° / 178° |
| Pixel pitch (mm) | 0.429(H) x 0.429(V) / RGB vertical stripe |
| Back light unit | Edge type LED |
| Life time (MTTF) | 30,000 Hour |
| 1-2. Connectivity | |
| RS232 (x2) | SoundBar Interface : Male Type RS232 : Female Type |
| Ethernet | Gigabit Ethernet / RJ45 JACK |
| Audio output | SPDIF |
| USB (x2) | 1x USB for data 1x USB for webcam |
| OPS port | Yes |
| Antenna | Wi-Fi Antenna |
| 1-3. Touch device | |
| Touch Technology | PCT(Projected Capacitive Technology) |
| Air Gap | 5.0mm |
| Number of sensors | 238 x 134 Line |
| Sensor pitch | 7.00mm |
| Cover Glass type | Tempered Glass with AG coating |
| Cover Glass thickness | 4.00mm(Typ) |
| Accuracy | ± 1.5 mm |
| Response time | 10ms |
| Input method | Finger, Passive stylus |
| Supported OS | Windows, Android, Linux, Mac, Web OS |
| Touch Points | 40 points(max) |

| 1-4. Features | |
|------------------------|------------------------------------------------|
| Video | |
| Color temperature | Normal / Warm / Cool / User |
| Picture mode | Standard / Dynamic / Soft / User |
| Zoom mode | Normal / Zoom / Cinema / Wide / User |
| Sound | |
| Surround Sound | On/Off |
| Sound mode | Standard / Music / Movie / Sports / User |
| Output | 8W 2ch |
| 1-5. Mechanical | |
| Outline dimension (mm) | 1739.0 x 1115.5.0 x 90.1 |
| Packing dimension (mm) | 1940.0 x 1295.0 x 300.0 |
| Product weight (Kg) | 95 |
| Packing weight (Kg) | 107 |
| Mount type (mm) | VESA 600(H) x 400(V) |
| 1-6. Reliability | |
| Power input range | 100V-240V~, 50-60Hz, 6A |
| Max power consumption | 311.0W |
| Standby power | 0.643W |
| Temperature | |
| Operating : 0~40°C | |
| Storage : -20~60°C | |
| Humidity | |
| Operating : 80% below | |
| Storage : 90% below | |
| Installation | Stand or wall mount. |
| Viewing orientation | Landscape only |
| 1-7 SoundBar | |
| Speaker | 140W 2ch (Stereo 70W + 70W) |
| Audio Input | SET-IF / SPDIF /AUX / Bluetooth |
| KEY | MUTE / VOL- / FUNCTION / VOL+ / Wireless Audio |

TECHNICAL DRAWING

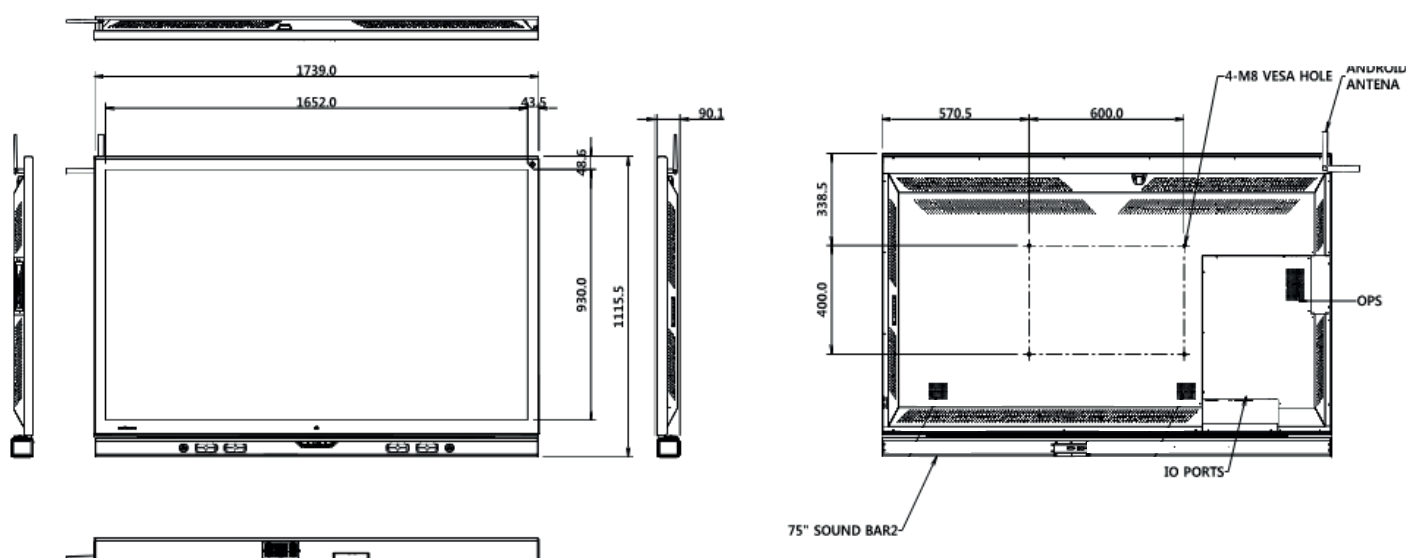

AUTHORISED DISTRIBUTOR